

Sample Code I²C

For communication with the SHT3x Humidity and Temperature Sensor through the I²C Interface

Introduction

This document contains sample code in C for communication with the SHT3x humidity and temperature sensor through the I²C Interface. The purpose of the code is to ease the user's software programming when implementing SHT3x sensors. Besides simple measurement of humidity and temperature, the code contains calculation of CRC checksum and calculation of physical humidity and temperature values. This sample code was written and optimized for the STM32-Discovery board from STMicroelectronics, but it can easily be applied to other microcontrollers with few changes.

1 Structure and Hierarchy of Code

The sample code is structured into various files. The relationship among the different files is given in Figure 1.

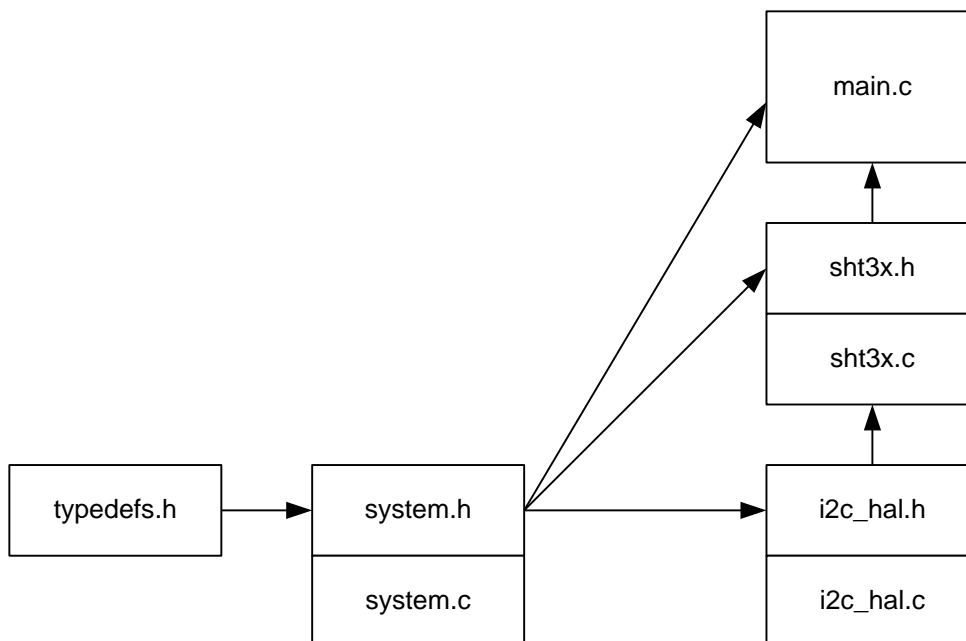


Figure 1 Structure of sample code for SHT3x

Table of Contents

1	Structure and Hierarchy of Code	1
2	Sample Code	2
2.1	main.c	2
2.2	sht3x.h	7
2.3	sht3x.c	13
2.4	i2c_hal.h	26
2.5	i2c_hal.c	28
2.6	system.h	31
2.7	system.c	32
2.8	typedefs.h	32

2 Sample Code

Below is the C code for the different files. The code was written and optimized for the STM32-Discovery board from STMicroelectronics (STM32VLDISCOVERY) and can be easily adapted to other microcontrollers. The portions that need to be adapted for porting to a different microcontroller are indicated in the comments.

2.1 main.c

```
//=====
//  S E N S I R I O N  AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project   :  SHT3x Sample Code (V1.1)
// File      :  main.c (V1.1)
// Author    :  RFU
// Date     :  6-Mai-2015
// Controller:  STM32F100RB
// IDE      :  µVision V5.12.0.0
// Compiler  :  Armcc
// Brief     :  This code shows how to implement the basic commands for the
//              SHT3x sensor chip.
//              Due to compatibility reasons the I2C interface is implemented
//              as "bit-banging" on normal I/O's. This code is written for an
//              easy understanding and is neither optimized for speed nor code
//              size.
//
// Porting to a different microcontroller (uC):
// - the definitions of basic types may have to be changed in typedefs.h
// - adapt the button and led functions for your platform in main.c
// - adapt the port functions / definitions for your uC in i2c_hal.h/.c
// - adapt the timing of the delay function for your uC in system.c
// - adapt the SystemInit() in system.c
// - change the uC register definition file <stm32f10x.h> in system.h
//=====

//-- Includes -----
#include "system.h"
#include "sht3x.h"

//-- Static function prototypes -----
static void EvalBoardPower_Init(void);
static void Led_Init(void);
static void UserButton_Init(void);
static void LedBlueOn(void);
static void LedBlueOff(void);
static void LedGreenOn(void);
static void LedGreenOff(void);
static u8t ReadUserButton(void);

//-----
int main(void)
{
    etError    error;        // error code
    u32t        serialNumber; // serial number
    regStatus   status;       // sensor status
    ft          temperature;  // temperature [°C]
    ft          humidity;     // relative humidity [%RH]
    bt          heater;       // heater, false: off, true: on

    SystemInit();
    Led_Init();
    UserButton_Init();
}
```

```

EvalBoardPower_Init();

SHT3X_Init(0x45); // Address: 0x44 = Sensor on EvalBoard connector
                  //          0x45 = Sensor on EvalBoard

// wait 50ms after power on
DelayMicroSeconds(50000);

error = SHT3x_ReadSerialNumber(&serialNumber);
if(error != NO_ERROR){} // do error handling here

// demonstrate a single shot measurement with clock-stretching
error = SHT3X_GetTempAndHumi(&temperature, &humidity, REPEATABLE_HIGH,
MODE_CLKSTRETCH, 50);
if(error != NO_ERROR){} // do error handling here

// demonstrate a single shot measurement with polling and 50ms timeout
error = SHT3X_GetTempAndHumi(&temperature, &humidity, REPEATABLE_HIGH, MODE_POLLING,
50);
if(error != NO_ERROR){} // do error handling here

// loop forever
while(1)
{
    error = NO_ERROR;

    // loop while no error
    while(error == NO_ERROR)
    {
        // read status register
        error |= SHT3X_ReadStatus(&status.u16);
        if(error != NO_ERROR) break;

        // check if the reset bit is set after a reset or power-up
        if(status.bit.ResetDetected)
        {
            //override default temperature and humidity alert limits (red LED)
            error = SHT3X_SetAlertLimits( 70.0f, 50.0f, // high set:  RH [%], T [°C]
                                         68.0f, 48.0f, // high clear: RH [%], T [°C]
                                         32.0f, -2.0f, // low clear:  RH [%], T [°C]
                                         30.0f, -4.0f); // low set:   RH [%], T [°C]
            if(error != NO_ERROR) break;

            // clear reset and alert flags
            error = SHT3X_ClearAllAlertFlags();
            if(error != NO_ERROR) break;

            //start periodic measurement, with high repeatability and 1 measurements per
second
            error = SHT3X_StartPeriodicMeasurment(REPEATABLE_HIGH, FREQUENCY_1HZ);
            if(error != NO_ERROR) break;

            //switch green LED on
            LedGreenOn();
        }

        // read measurment buffer
        error = SHT3X_ReadMeasurementBuffer(&temperature, &humidity);
        if(error == NO_ERROR)
        {
            // flash blue LED to signalise new temperature and humidity values

```

```
LedBlueOn();
DelayMicroSeconds(10000);
LedBlueOff();
}
else if (error == ACK_ERROR)
{
    // there were no new values in the buffer -> ignore this error
    error = NO_ERROR;
}
else break;

// read heater status
heater = status.bit.HeaterStatus ? TRUE : FALSE;

// if the user button is not pressed ...
if(ReadUserButton() == 0)
{
    // ... and the heater is on
    if(heater)
    {
        // switch off the sensor internal heater
        error |= SHT3X_DisableHeater();
        if(error != NO_ERROR) break;
    }
}
else
// if the user button is pressed ...
{
    // ... and the heater is off
    if(!heater)
    {
        // switch on the sensor internal heater
        error |= SHT3X_EnableHeater();
        if(error != NO_ERROR) break;
    }
}

// wait 100ms
DelayMicroSeconds(100000);
}

// in case of an error ...

// ... switch green and blue LED off
LedGreenOff();
LedBlueOff();

// ... try first a soft reset ...
error = SHT3X_SoftReset();

// ... if the soft reset fails, do a hard reset
if(error != NO_ERROR)
{
    SHT3X_HardReset();
}

// flash green LED to signalise an error
LedGreenOn();
DelayMicroSeconds(10000);
LedGreenOff();
}
}
```

```
//-----
static void EvalBoardPower_Init(void)      /* -- adapt this code for your platform --
*/
{
    RCC->APB2ENR |= 0x00000008; // I/O port B clock enabled

    GPIOB->CRH   &= 0x0FFF0FFF; // set push-pull output for Vdd & GND pins
    GPIOB->CRH   |= 0x10001000; //

    GPIOB->BSRR = 0x08008000; // set Vdd to High, set GND to Low
}

//-----
static void Led_Init(void)                  /* -- adapt this code for your platform --
*/
{
    RCC->APB2ENR |= 0x00000010; // I/O port C clock enabled
    GPIOC->CRH   &= 0xFFFFF000; // set general purpose output mode for LEDs
    GPIOC->CRH   |= 0x00000011; //
    GPIOC->BSRR  = 0x03000000; // LEDs off
}

//-----
static void UserButton_Init(void)           /* -- adapt this code for your platform --
*/
{
    RCC->APB2ENR |= 0x00000004; // I/O port A clock enabled
    GPIOA->CRH   &= 0xFFFFF000; // set general purpose input mode for User Button
    GPIOA->CRH   |= 0x00000004; //
}

//-----
static void LedBlueOn(void)                 /* -- adapt this code for your platform --
*/
{
    GPIOC->BSRR = 0x00000100;
}

//-----
static void LedBlueOff(void)                /* -- adapt this code for your platform --
*/
{
    GPIOC->BSRR = 0x01000000;
}

//-----
static void LedGreenOn(void)                /* -- adapt this code for your platform --
*/
{
    GPIOC->BSRR = 0x00000200;
}

//-----
static void LedGreenOff(void)               /* -- adapt this code for your platform --
*/
{
    GPIOC->BSRR = 0x02000000;
}

//-----
```

```
static u8t ReadUserButton(void)          /* -- adapt this code for your platform --  
*/  
{  
    return (GPIOA->IDR & 0x00000001);  
}  
  
}
```

2.2 sht3x.h

```
//=====
//      S E N S I R I O N      AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project      :  SHT3x Sample Code (V1.1)
// File         :  sht3x.h (V1.1)
// Author       :  RFU
// Date        :  6-Mai-2015
// Controller   :  STM32F100RB
// IDE          :  µVision V5.12.0.0
// Compiler     :  Armcc
// Brief        :  Sensor Layer: Definitions of commands and functions for sensor
//                  access.
//=====

#ifndef SHT3X_H
#define SHT3X_H

//-- Includes -----
#include "system.h"
#include "i2c_hal.h"

//-- Enumerations -----
// Sensor Commands
typedef enum{
    CMD_READ_SERIALNBR = 0x3780, // read serial number
    CMD_READ_STATUS    = 0xF32D, // read status register
    CMD_CLEAR_STATUS    = 0x3041, // clear status register
    CMD_HEATER_ENABLE   = 0x306D, // enabled heater
    CMD_HEATER_DISABLE  = 0x3066, // disable heater
    CMD_SOFT_RESET      = 0x30A2, // soft reset
    CMD_MEAS_CLOCKSTR_H = 0x2C06, // measurement: clock stretching, high repeatability
    CMD_MEAS_CLOCKSTR_M = 0x2C0D, // measurement: clock stretching, medium
repeatability
    CMD_MEAS_CLOCKSTR_L = 0x2C10, // measurement: clock stretching, low repeatability
    CMD_MEAS_POLLING_H  = 0x2400, // measurement: polling, high repeatability
    CMD_MEAS_POLLING_M  = 0x240B, // measurement: polling, medium repeatability
    CMD_MEAS_POLLING_L  = 0x2416, // measurement: polling, low repeatability
    CMD_MEAS_PERI_05_H  = 0x2032, // measurement: periodic 0.5 mps, high repeatability
    CMD_MEAS_PERI_05_M  = 0x2024, // measurement: periodic 0.5 mps, medium
repeatability
    CMD_MEAS_PERI_05_L  = 0x202F, // measurement: periodic 0.5 mps, low repeatability
    CMD_MEAS_PERI_1_H   = 0x2130, // measurement: periodic 1 mps, high repeatability
    CMD_MEAS_PERI_1_M   = 0x2126, // measurement: periodic 1 mps, medium repeatability
    CMD_MEAS_PERI_1_L   = 0x212D, // measurement: periodic 1 mps, low repeatability
    CMD_MEAS_PERI_2_H   = 0x2236, // measurement: periodic 2 mps, high repeatability
    CMD_MEAS_PERI_2_M   = 0x2220, // measurement: periodic 2 mps, medium repeatability
    CMD_MEAS_PERI_2_L   = 0x222B, // measurement: periodic 2 mps, low repeatability
    CMD_MEAS_PERI_4_H   = 0x2334, // measurement: periodic 4 mps, high repeatability
    CMD_MEAS_PERI_4_M   = 0x2322, // measurement: periodic 4 mps, medium repeatability
    CMD_MEAS_PERI_4_L   = 0x2329, // measurement: periodic 4 mps, low repeatability
    CMD_MEAS_PERI_10_H  = 0x2737, // measurement: periodic 10 mps, high repeatability
    CMD_MEAS_PERI_10_M  = 0x2721, // measurement: periodic 10 mps, medium
repeatability
    CMD_MEAS_PERI_10_L  = 0x272A, // measurement: periodic 10 mps, low repeatability
    CMD_FETCH_DATA      = 0xE000, // readout measurements for periodic mode
    CMD_R_AL_LIM_LS     = 0xE102, // read alert limits, low set
    CMD_R_AL_LIM_LC     = 0xE109, // read alert limits, low clear
    CMD_R_AL_LIM_HS     = 0xE11F, // read alert limits, high set
    CMD_R_AL_LIM_HC     = 0xE114, // read alert limits, high clear
    CMD_W_AL_LIM_HS     = 0x611D, // write alert limits, high set
    CMD_W_AL_LIM_HC     = 0x6116, // write alert limits, high clear
}
```

```

    CMD_W_AL_LIM_LC      = 0x610B, // write alert limits, low clear
    CMD_W_AL_LIM_LS      = 0x6100, // write alert limits, low set
    CMD_NO_SLEEP          = 0x303E,
}etCommands;

// Measurement Repeatability
typedef enum{
    REPEATAB_HIGH,      // high repeatability
    REPEATAB_MEDIUM,    // medium repeatability
    REPEATAB_LOW,       // low repeatability
}etRepeatability;

// Measurement Mode
typedef enum{
    MODE_CLKSTRETCH,    // clock stretching
    MODE_POLLING,       // polling
}etMode;

typedef enum{
    FREQUENCY_HZ5,      // 0.5 measurements per seconds
    FREQUENCY_1HZ,      // 1.0 measurements per seconds
    FREQUENCY_2HZ,      // 2.0 measurements per seconds
    FREQUENCY_4HZ,      // 4.0 measurements per seconds
    FREQUENCY_10HZ,     // 10.0 measurements per seconds
}etFrequency;

//-- Typedefs -----
// Status-Register
typedef union {
    ul6t ul6;
    struct{
        #ifdef LITTLE_ENDIAN // bit-order is little endian
            ul6t CrcStatus      : 1; // write data checksum status
            ul6t CmdStatus      : 1; // command status
            ul6t Reserve0       : 2; // reserved
            ul6t ResetDetected  : 1; // system reset detected
            ul6t Reserve1       : 5; // reserved
            ul6t T_Alert        : 1; // temperature tracking alert
            ul6t RH_Alert       : 1; // humidity tracking alert
            ul6t Reserve2       : 1; // reserved
            ul6t HeaterStatus   : 1; // heater status
            ul6t Reserve3       : 1; // reserved
            ul6t AlertPending   : 1; // alert pending status
        #else // bit-order is big endian
            ul6t AlertPending   : 1;
            ul6t Reserve3       : 1;
            ul6t HeaterStatus   : 1;
            ul6t Reserve2       : 1;
            ul6t RH_Alert       : 1;
            ul6t T_Alert        : 1;
            ul6t Reserve1       : 5;
            ul6t ResetDetected  : 1;
            ul6t Reserve0       : 2;
            ul6t CmdStatus      : 1;
            ul6t CrcStatus      : 1;
        #endif
    }bit;
} regStatus;

//=====
// Initializes the I2C bus for communication with the sensor.

```



```

//-----
// input: i2cAddress    I2C address, 0x44 ADDR pin low / 0x45 ADDR pin high
//-----
void SHT3X_Init(u8t i2cAddress);

//=====
// Sets the I2C address.
//-----
// input: i2cAddress    I2C address, 0x44 ADDR pin low / 0x45 ADDR pin high
//-----
void SHT3X_SetI2cAdr(u8t i2cAddress);

//=====
// Reads the serial number from sensor.
//-----
// input: serialNumber  pointer to serialNumber
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   NO_ERROR       = no error
//-----
etError SHT3x_ReadSerialNumber(u32t* serialNumber);

//=====
// Reads the status register from the sensor.
//-----
// input: status        pointer to status
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   NO_ERROR       = no error
//-----
etError SHT3X_ReadStatus(u16t* status);

//=====
// Clears all alert flags in status register from sensor.
//-----
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   NO_ERROR       = no error
//-----
etError SHT3X_ClearAllAlertFlags(void);

//=====
// Gets the temperature [°C] and the relative humidity [%RH] from the sensor.
//-----
// input: temperature  pointer to temperature
//       humidity      pointer to humidity
//       repeatability repeatability for the measurement [low, medium, high]
//       mode          command mode [clock stretching, polling]
//       timeout       timeout in milliseconds
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch

```

```

//          TIMEOUT_ERROR = timeout
//          PARM_ERROR    = parameter out of range
//          NO_ERROR      = no error
//-----
etError SHT3X_GetTempAndHumi(ft* temperature, ft* humidity,
                             etRepeatability repeatability, etMode mode,
                             u8t timeout);

//=====
// Gets the temperature [°C] and the relative humidity [%RH] from the sensor.
// This function uses the i2c clock stretching for waiting until measurement is
// ready.
//-----
// input: temperature  pointer to temperature
//        humidity     pointer to humidity
//        repeatability repeatability for the measurement [low, medium, high]
//        timeout       clock stretching timeout in milliseconds
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   PARM_ERROR     = parameter out of range
//                   NO_ERROR       = no error
//-----
etError SHT3X_GetTempAndHumiClkStretch(ft* temperature, ft* humidity,
                                       etRepeatability repeatability,
                                       u8t timeout);

//=====
// Gets the temperature [°C] and the relative humidity [%RH] from the sensor.
// This function polls every 1ms until measurement is ready.
//-----
// input: temperature  pointer to temperature
//        humidity     pointer to humidity
//        repeatability repeatability for the measurement [low, medium, high]
//        timeout       polling timeout in milliseconds
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   PARM_ERROR     = parameter out of range
//                   NO_ERROR       = no error
//-----
etError SHT3X_GetTempAndHumiPolling(ft* temperature, ft* humidity,
                                    etRepeatability repeatability,
                                    u8t timeout);

//=====
// Starts periodic measurement.
//-----
// input: repeatability repeatability for the measurement [low, medium, high]
//        frequency     measurement frequency [0.5, 1, 2, 4, 10] Hz
//
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   PARM_ERROR     = parameter out of range
//                   NO_ERROR       = no error
//-----

```

```

etError SHT3X_StartPeriodicMeasurment(etRepeatability repeatability,
                                      etFrequency frequency);

//=====
// Reads last measurement from the sensor buffer
//-----
// input: temperature    pointer to temperature
//         humidity      pointer to humidity
//
// return: error:        ACK_ERROR      = no acknowledgment from sensor
//                     CHECKSUM_ERROR = checksum mismatch
//                     TIMEOUT_ERROR  = timeout
//                     NO_ERROR       = no error
//-----
etError SHT3X_ReadMeasurementBuffer(ft* temperature, ft* humidity);

//=====
// Enables the heater on sensor
//-----
// return: error:        ACK_ERROR      = no acknowledgment from sensor
//                     CHECKSUM_ERROR = checksum mismatch
//                     TIMEOUT_ERROR  = timeout
//                     NO_ERROR       = no error
//-----
etError SHT3X_EnableHeater(void);

//=====
// Disables the heater on sensor
//-----
// return: error:        ACK_ERROR      = no acknowledgment from sensor
//                     CHECKSUM_ERROR = checksum mismatch
//                     TIMEOUT_ERROR  = timeout
//                     NO_ERROR       = no error
//-----
etError SHT3X_DisableHeater(void);

//=====
//
//-----
etError SHT3X_SetAlertLimits(ft humidityHighSet,    ft temperatureHighSet,
                           ft humidityHighClear, ft temperatureHighClear,
                           ft humidityLowClear,   ft temperatureLowClear,
                           ft humidityLowSet,     ft temperatureLowSet);

//=====
//
//-----
etError SHT3X_GetAlertLimits(ft* humidityHighSet,    ft* temperatureHighSet,
                           ft* humidityHighClear, ft* temperatureHighClear,
                           ft* humidityLowClear,   ft* temperatureLowClear,
                           ft* humidityLowSet,     ft* temperatureLowSet);

//=====
// Returns the state of the Alert-Pin.
//-----
// return:        true: Alert-Pin is high
//               false: Alter-Pin is low
//-----
bt SHT3X_ReadAlert(void);

```

```
//=====
// Calls the soft reset mechanism that forces the sensor into a well-defined
// state without removing the power supply.
//-----
// return: error:      ACK_ERROR      = no acknowledgment from sensor
//                   CHECKSUM_ERROR = checksum mismatch
//                   TIMEOUT_ERROR  = timeout
//                   NO_ERROR       = no error
//-----
etError SHT3X_SoftReset(void);

//=====
// Resets the sensor by pulling down the reset pin.
//-----
void SHT3X_HardReset(void);

#endif
```

2.3 sht3x.c

```
//=====
//      S E N S I R I O N      AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project      :  SHT3x Sample Code (V1.1)
// File         :  sht3x.c (V1.1)
// Author       :  RFU
// Date        :  6-Mai-2015
// Controller   :  STM32F100RB
// IDE         :  uVision V5.12.0.0
// Compiler    :  Armcc
// Brief       :  Sensor Layer: Implementation of functions for sensor access.
//=====

//-- Includes -----
#include "sht3x.h"
#include "i2c_hal.h"

//-- Defines -----
// Generator polynomial for CRC
#define POLYNOMIAL  0x131 // P(x) = x^8 + x^5 + x^4 + 1 = 100110001

//=====
// IO-Pins                      /* -- adapt the defines for your uC -- */
//-----
// Reset on port B, bit 12
#define RESET_LOW()  (GPIOB->BSRR = 0x10000000) // set Reset to low
#define RESET_HIGH() (GPIOB->BSRR = 0x00001000) // set Reset to high

// Alert on port B, bit 10
#define ALERT_READ   (GPIOB->IDR  & 0x0400)      // read Alert
//=====

//-- Global variables -----
static u8t _i2cAddress; // I2C Address

//-- Static function prototypes -----
static etError SHT3X_WriteAlertLimitData(ft humidity, ft temperature);
static etError SHT3X_ReadAlertLimitData(ft* humidity, ft* temperature);
static etError SHT3X_StartWriteAccess(void);
static etError SHT3X_StartReadAccess(void);
static void SHT3X_StopAccess(void);
static etError SHT3X_WriteCommand(etCommands command);
static etError SHT3X_Read2BytesAndCrc(u16t* data, etI2cAck finaleAckNack,
                                     u8t timeout);
static etError SHT3X_Write2BytesAndCrc(u16t data);
static u8t SHT3X_CalcCrc(u8t data[], u8t nbrOfBytes);
static etError SHT3X_CheckCrc(u8t data[], u8t nbrOfBytes, u8t checksum);
static ft SHT3X_CalcTemperature(u16t rawValue);
static ft SHT3X_CalcHumidity(u16t rawValue);
static u16t SHT3X_CalcRawTemperature(ft temperature);
static u16t SHT3X_CalcRawHumidity(ft humidity);

//-----
void SHT3X_Init(u8t i2cAddress)          /* -- adapt the init for your uC -- */
{
    // init I/O-pins
    RCC->APB2ENR |= 0x00000008; // I/O port B clock enabled

    // Alert on port B, bit 10
    GPIOB->CRH   &= 0xFFFF00FF; // set floating input for Alert-Pin
    GPIOB->CRH   |= 0x00000400; //

```

```

// Reset on port B, bit 12
GPIOB->CRH   &= 0xFFFF0FFF; // set push-pull output for Reset pin
GPIOB->CRH   |= 0x00010000; //
RESET_LOW();

I2c_Init(); // init I2C
SHT3X_SetI2cAdr(i2cAddress);

// release reset
RESET_HIGH();
}

//-----
void SHT3X_SetI2cAdr(u8t i2cAddress)
{
    _i2cAddress = i2cAddress;
}

//-----
etError SHT3x_ReadSerialNumber(u32t* serialNumber)
{
    etError error; // error code
    ul6t serialNumWords[2];

    error = SHT3X_StartWriteAccess();

    // write "read serial number" command
    error |= SHT3X_WriteCommand(CMD_READ_SERIALNBR);
    // if no error, start read access
    if(error == NO_ERROR) error = SHT3X_StartReadAccess();
    // if no error, read first serial number word
    if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&serialNumWords[0], ACK,
100);
    // if no error, read second serial number word
    if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&serialNumWords[1], NACK, 0);

    SHT3X_StopAccess();

    // if no error, calc serial number as 32-bit integer
    if(error == NO_ERROR)
    {
        *serialNumber = (serialNumWords[0] << 16) | serialNumWords[1];
    }

    return error;
}

//-----
etError SHT3X_ReadStatus(ul6t* status)
{
    etError error; // error code

    error = SHT3X_StartWriteAccess();

    // if no error, write "read status" command
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_READ_STATUS);
    // if no error, start read access
    if(error == NO_ERROR) error = SHT3X_StartReadAccess();
    // if no error, read status
    if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(status, NACK, 0);
}

```

```

    SHT3X_StopAccess();

    return error;
}

//-----
etError SHT3X_ClearAllAlertFlags(void)
{
    etError error; // error code

    error = SHT3X_StartWriteAccess();

    // if no error, write clear status register command
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_CLEAR_STATUS);

    SHT3X_StopAccess();

    return error;
}

//-----
etError SHT3X_GetTempAndHumi(ft* temperature, ft* humidity,
                             etRepeatability repeatability, etMode mode,
                             u8t timeout)
{
    etError error;

    switch(mode)
    {
        case MODE_CLKSTRETCH: // get temperature with clock stretching mode
            error = SHT3X_GetTempAndHumiClkStretch(temperature, humidity,
                                                    repeatability, timeout);

            break;
        case MODE_POLLING: // get temperature with polling mode
            error = SHT3X_GetTempAndHumiPolling(temperature, humidity,
                                                repeatability, timeout);

            break;
        default:
            error = PARM_ERROR;
            break;
    }

    return error;
}

//-----
etError SHT3X_GetTempAndHumiClkStretch(ft* temperature, ft* humidity,
                                       etRepeatability repeatability,
                                       u8t timeout)
{
    etError error; // error code
    u16t rawValueTemp; // temperature raw value from sensor
    u16t rawValueHumi; // humidity raw value from sensor

    error = SHT3X_StartWriteAccess();

    // if no error ...
    if(error == NO_ERROR)
    {
        // start measurement in clock stretching mode
        // use depending on the required repeatability, the corresponding command

```

```

switch(repeatability)
{
    case REPEATAB_LOW:
        error = SHT3X_WriteCommand(CMD_MEAS_CLOCKSTR_L);
        break;
    case REPEATAB_MEDIUM:
        error = SHT3X_WriteCommand(CMD_MEAS_CLOCKSTR_M);
        break;
    case REPEATAB_HIGH:
        error = SHT3X_WriteCommand(CMD_MEAS_CLOCKSTR_H);
        break;
    default:
        error = PARM_ERROR;
        break;
}
}

// if no error, start read access
if(error == NO_ERROR) error = SHT3X_StartReadAccess();
// if no error, read temperature raw values
if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&rawValueTemp, ACK, timeout);
// if no error, read humidity raw values
if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&rawValueHumi, NACK, 0);

SHT3X_StopAccess();

// if no error, calculate temperature in °C and humidity in %RH
if(error == NO_ERROR)
{
    *temperature = SHT3X_CalcTemperature(rawValueTemp);
    *humidity = SHT3X_CalcHumidity(rawValueHumi);
}

return error;
}

//-----
etError SHT3X_GetTempAndHumiPolling(ft* temperature, ft* humidity,
                                   etRepeatability repeatability,
                                   u8t timeout)
{
    etError error;           // error code
    u16t   rawValueTemp;     // temperature raw value from sensor
    u16t   rawValueHumi;     // humidity raw value from sensor

    error = SHT3X_StartWriteAccess();

    // if no error ...
    if(error == NO_ERROR)
    {
        // start measurement in polling mode
        // use depending on the required repeatability, the corresponding command
        switch(repeatability)
        {
            case REPEATAB_LOW:
                error = SHT3X_WriteCommand(CMD_MEAS_POLLING_L);
                break;
            case REPEATAB_MEDIUM:
                error = SHT3X_WriteCommand(CMD_MEAS_POLLING_M);
                break;
            case REPEATAB_HIGH:
                error = SHT3X_WriteCommand(CMD_MEAS_POLLING_H);

```



```

        break;
    default:
        error = PARM_ERROR;
        break;
    }
}

// if no error, wait until measurement ready
if(error == NO_ERROR)
{
    // poll every 1ms for measurement ready until timeout
    while(timeout--)
    {
        // check if the measurement has finished
        error = SHT3X_StartReadAccess();

        // if measurement has finished -> exit loop
        if(error == NO_ERROR) break;

        // delay 1ms
        DelayMicroSeconds(1000);
    }

    // if no error, read temperature and humidity raw values
    if(error == NO_ERROR)
    {
        error |= SHT3X_Read2BytesAndCrc(&rawValueTemp, ACK, 0);
        error |= SHT3X_Read2BytesAndCrc(&rawValueHumi, NACK, 0);
    }

    SHT3X_StopAccess();

    // if no error, calculate temperature in °C and humidity in %RH
    if(error == NO_ERROR)
    {
        *temperature = SHT3X_CalcTemperature(rawValueTemp);
        *humidity = SHT3X_CalcHumidity(rawValueHumi);
    }

    return error;
}

//-----
etError SHT3X_StartPeriodicMeasurment(etRepeatability repeatability,
                                     etFrequency frequency)
{
    etError error;          // error code

    error = SHT3X_StartWriteAccess();

    // if no error, start periodic measurement
    if(error == NO_ERROR)
    {
        // use depending on the required repeatability and frequency,
        // the corresponding command
        switch(repeatability)
        {
            case REPEATAB_LOW: // low repeatability
                switch(frequency)
                {
                    case FREQUENCY_HZ5: // low repeatability, 0.5 Hz
                        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_05_L);
                }
            }
        }
    }
}

```

```

    break;
case FREQUENCY_1HZ: // low repeatability, 1.0 Hz
    error |= SHT3X_WriteCommand(CMD_MEAS_PERI_1_L);
    break;
case FREQUENCY_2HZ: // low repeatability, 2.0 Hz
    error |= SHT3X_WriteCommand(CMD_MEAS_PERI_2_L);
    break;
case FREQUENCY_4HZ: // low repeatability, 4.0 Hz
    error |= SHT3X_WriteCommand(CMD_MEAS_PERI_4_L);
    break;
case FREQUENCY_10HZ: // low repeatability, 10.0 Hz
    error |= SHT3X_WriteCommand(CMD_MEAS_PERI_10_L);
    break;
default:
    error |= PARM_ERROR;
    break;
}
break;

case REPEATAB_MEDIUM: // medium repeatability
switch(frequency)
{
    case FREQUENCY_HZ5: // medium repeatability, 0.5 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_05_M);
        break;
    case FREQUENCY_1HZ: // medium repeatability, 1.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_1_M);
        break;
    case FREQUENCY_2HZ: // medium repeatability, 2.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_2_M);
        break;
    case FREQUENCY_4HZ: // medium repeatability, 4.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_4_M);
        break;
    case FREQUENCY_10HZ: // medium repeatability, 10.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_10_M);
        break;
    default:
        error |= PARM_ERROR;
        break;
}
break;

case REPEATAB_HIGH: // high repeatability
switch(frequency)
{
    case FREQUENCY_HZ5: // high repeatability, 0.5 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_05_H);
        break;
    case FREQUENCY_1HZ: // high repeatability, 1.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_1_H);
        break;
    case FREQUENCY_2HZ: // high repeatability, 2.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_2_H);
        break;
    case FREQUENCY_4HZ: // high repeatability, 4.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_4_H);
        break;
    case FREQUENCY_10HZ: // high repeatability, 10.0 Hz
        error |= SHT3X_WriteCommand(CMD_MEAS_PERI_10_H);
        break;
    default:

```

```

        error |= PARM_ERROR;
        break;
    }
    break;
default:
    error |= PARM_ERROR;
    break;
}
}

SHT3X_StopAccess();

return error;
}

//-----
etError SHT3X_ReadMeasurementBuffer(ft* temperature, ft* humidity)
{
    etError error; // error code
    ul6t rawValueTemp; // temperature raw value from sensor
    ul6t rawValueHumi; // humidity raw value from sensor

    error = SHT3X_StartWriteAccess();

    // if no error, read measurements
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_FETCH_DATA);
    if(error == NO_ERROR) error = SHT3X_StartReadAccess();
    if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&rawValueTemp, ACK, 0);
    if(error == NO_ERROR) error = SHT3X_Read2BytesAndCrc(&rawValueHumi, NACK, 0);

    // if no error, calculate temperature in °C and humidity in %RH
    if(error == NO_ERROR)
    {
        *temperature = SHT3X_CalcTemperature(rawValueTemp);
        *humidity = SHT3X_CalcHumidity(rawValueHumi);
    }

    SHT3X_StopAccess();

    return error;
}

//-----
etError SHT3X_EnableHeater(void)
{
    etError error; // error code

    error = SHT3X_StartWriteAccess();

    // if no error, write heater enable command
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_HEATER_ENABLE);

    SHT3X_StopAccess();

    return error;
}

//-----
etError SHT3X_DisableHeater(void)
{
    etError error; // error code

```

```

error = SHT3X_StartWriteAccess();

// if no error, write heater disable command
if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_HEATER_DISABLE);

SHT3X_StopAccess();

return error;
}

//-----
etError SHT3X_SetAlertLimits(ft humidityHighSet,    ft temperatureHighSet,
                           ft humidityHighClear,  ft temperatureHighClear,
                           ft humidityLowClear,   ft temperatureLowClear,
                           ft humidityLowSet,     ft temperatureLowSet)
{
    etError error; // error code

    // write humidity & temperature alter limits, high set
    error = SHT3X_StartWriteAccess();
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_W_AL_LIM_HS);
    if(error == NO_ERROR) error = SHT3X_WriteAlertLimitData(humidityHighSet,
                                                            temperatureHighSet);
    SHT3X_StopAccess();

    if(error == NO_ERROR)
    {
        // write humidity & temperature alter limits, high clear
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_W_AL_LIM_HC);
        if(error == NO_ERROR) error = SHT3X_WriteAlertLimitData(humidityHighClear,
                                                                temperatureHighClear);
        SHT3X_StopAccess();
    }

    if(error == NO_ERROR)
    {
        // write humidity & temperature alter limits, low clear
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_W_AL_LIM_LC);
        if(error == NO_ERROR) error = SHT3X_WriteAlertLimitData(humidityLowClear,
                                                                temperatureLowClear);
        SHT3X_StopAccess();
    }

    if(error == NO_ERROR)
    {
        // write humidity & temperature alter limits, low set
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_W_AL_LIM_LS);
        if(error == NO_ERROR) error = SHT3X_WriteAlertLimitData(humidityLowSet,
                                                                temperatureLowSet);
        SHT3X_StopAccess();
    }

    return error;
}

//-----
etError SHT3X_GetAlertLimits(ft* humidityHighSet,    ft* temperatureHighSet,
                           ft* humidityHighClear,  ft* temperatureHighClear,

```

```

        ft* humidityLowClear,    ft* temperatureLowClear,
        ft* humidityLowSet,      ft* temperatureLowSet)
{
    etError error; // error code

    // read humidity & temperature alter limits, high set
    error = SHT3X_StartWriteAccess();
    if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_R_AL_LIM_HS);
    if(error == NO_ERROR) error = SHT3X_StartReadAccess();
    if(error == NO_ERROR) error = SHT3X_ReadAlertLimitData(humidityHighSet,
                                                            temperatureHighSet);

    SHT3X_StopAccess();

    if(error == NO_ERROR)
    {
        // read humidity & temperature alter limits, high clear
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_R_AL_LIM_HC);
        if(error == NO_ERROR) error = SHT3X_StartReadAccess();
        if(error == NO_ERROR) error = SHT3X_ReadAlertLimitData(humidityHighClear,
                                                                temperatureHighClear);

        SHT3X_StopAccess();
    }

    if(error == NO_ERROR)
    {
        // read humidity & temperature alter limits, low clear
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_R_AL_LIM_LC);
        if(error == NO_ERROR) error = SHT3X_StartReadAccess();
        if(error == NO_ERROR) error = SHT3X_ReadAlertLimitData(humidityLowClear,
                                                                temperatureLowClear);

        SHT3X_StopAccess();
    }

    if(error == NO_ERROR)
    {
        // read humidity & temperature alter limits, low set
        error = SHT3X_StartWriteAccess();
        if(error == NO_ERROR) error = SHT3X_WriteCommand(CMD_R_AL_LIM_LS);
        if(error == NO_ERROR) error = SHT3X_StartReadAccess();
        if(error == NO_ERROR) error = SHT3X_ReadAlertLimitData(humidityLowSet,
                                                                temperatureLowSet);

        SHT3X_StopAccess();
    }

    return error;
}

//-----
bt SHT3X_ReadAlert(void)
{
    // read alert pin
    return (ALERT_READ != 0) ? TRUE : FALSE;
}

//-----
etError SHT3X_SoftReset(void)
{
    etError error; // error code

    error = SHT3X_StartWriteAccess();

```

```

// write reset command
error |= SHT3X_WriteCommand(CMD_SOFT_RESET);

SHT3X_StopAccess();

// if no error, wait 50 ms after reset
if(error == NO_ERROR) DelayMicroSeconds(50000);

return error;
}

//-----
void SHT3X_HardReset(void)
{
    // set reset low
    RESET_LOW();

    // wait 100 ms
    DelayMicroSeconds(100000);

    // release reset
    RESET_HIGH();

    // wait 50 ms after reset
    DelayMicroSeconds(50000);
}

//-----
static etError SHT3X_WriteAlertLimitData(ft humidity, ft temperature)
{
    etError error;          // error code

    il6t rawHumidity;
    il6t rawTemperature;

    if((humidity < 0.0f) || (humidity > 100.0f)
    || (temperature < -45.0f) || (temperature > 130.0f))
    {
        error = PARM_ERROR;
    }
    else
    {
        rawHumidity    = SHT3X_CalcRawHumidity(humidity);
        rawTemperature = SHT3X_CalcRawTemperature(temperature);

        error = SHT3X_Write2BytesAndCrc((rawHumidity & 0xFE00) | ((rawTemperature >> 7)
        & 0x001FF));
    }

    return error;
}

//-----
static etError SHT3X_ReadAlertLimitData(ft* humidity, ft* temperature)
{
    etError error;          // error code
    ul6t data;

    error = SHT3X_Read2BytesAndCrc(&data, NACK, 0);

```

```

    if(error == NO_ERROR)
    {
        *humidity = SHT3X_CalcHumidity(data & 0xFE00);
        *temperature = SHT3X_CalcTemperature(data << 7);
    }

    return error;
}

//-----
static etError SHT3X_StartWriteAccess(void)
{
    etError error; // error code

    // write a start condition
    I2c_StartCondition();

    // write the sensor I2C address with the write flag
    error = I2c_WriteByte(_i2cAddress << 1);

    return error;
}

//-----
static etError SHT3X_StartReadAccess(void)
{
    etError error; // error code

    // write a start condition
    I2c_StartCondition();

    // write the sensor I2C address with the read flag
    error = I2c_WriteByte(_i2cAddress << 1 | 0x01);

    return error;
}

//-----
static void SHT3X_StopAccess(void)
{
    // write a stop condition
    I2c_StopCondition();
}

//-----
static etError SHT3X_WriteCommand(etCommands command)
{
    etError error; // error code

    // write the upper 8 bits of the command to the sensor
    error = I2c_WriteByte(command >> 8);

    // write the lower 8 bits of the command to the sensor
    error |= I2c_WriteByte(command & 0xFF);

    return error;
}

//-----
static etError SHT3X_Read2BytesAndCrc(u16t* data, etI2cAck finaleAckNack,
                                     u8t timeout)
{

```

```

etError error;    // error code
u8t    bytes[2]; // read data array
u8t    checksum;  // checksum byte

// read two data bytes and one checksum byte
error = I2c_ReadByte(&bytes[0], ACK, timeout);
if(error == NO_ERROR) error = I2c_ReadByte(&bytes[1], ACK, 0);
if(error == NO_ERROR) error = I2c_ReadByte(&checksum, finaleAckNack, 0);

// verify checksum
if(error == NO_ERROR) error = SHT3X_CheckCrc(bytes, 2, checksum);

// combine the two bytes to a 16-bit value
*data = (bytes[0] << 8) | bytes[1];

return error;
}

//-----
static etError SHT3X_Write2BytesAndCrc(u16t data)
{
    etError error;    // error code
    u8t    bytes[2]; // read data array
    u8t    checksum;  // checksum byte

    bytes[0] = data >> 8;
    bytes[1] = data & 0xFF;
    checksum = SHT3X_CalcCrc(bytes, 2);

    // write two data bytes and one checksum byte
    error = I2c_WriteByte(bytes[0]); // write data MSB
    if(error == NO_ERROR) error = I2c_WriteByte(bytes[1]); // write data LSB
    if(error == NO_ERROR) error = I2c_WriteByte(checksum); // write checksum

    return error;
}

//-----
static u8t SHT3X_CalcCrc(u8t data[], u8t nbrOfBytes)
{
    u8t bit;    // bit mask
    u8t crc = 0xFF; // calculated checksum
    u8t byteCtr; // byte counter

    // calculates 8-Bit checksum with given polynomial
    for(byteCtr = 0; byteCtr < nbrOfBytes; byteCtr++)
    {
        crc ^= (data[byteCtr]);
        for(bit = 8; bit > 0; --bit)
        {
            if(crc & 0x80) crc = (crc << 1) ^ POLYNOMIAL;
            else          crc = (crc << 1);
        }
    }

    return crc;
}

//-----
static etError SHT3X_CheckCrc(u8t data[], u8t nbrOfBytes, u8t checksum)
{
    u8t crc;    // calculated checksum

```



```
// calculates 8-Bit checksum
crc = SHT3X_CalcCrc(data, nbrOfBytes);

// verify checksum
if(crc != checksum) return CHECKSUM_ERROR;
else return NO_ERROR;
}

//-----
static ft SHT3X_CalcTemperature(u16t rawValue)
{
    // calculate temperature [°C]
    // T = -45 + 175 * rawValue / (2^16-1)
    return 175.0f * (ft)rawValue / 65535.0f - 45.0f;
}

//-----
static ft SHT3X_CalcHumidity(u16t rawValue)
{
    // calculate relative humidity [%RH]
    // RH = rawValue / (2^16-1) * 100
    return 100.0f * (ft)rawValue / 65535.0f;
}

//-----
static u16t SHT3X_CalcRawTemperature(ft temperature)
{
    // calculate raw temperature [ticks]
    // rawT = (temperature + 45) / 175 * (2^16-1)
    return (temperature + 45.0f) / 175.0f * 65535.0f;
}

//-----
static u16t SHT3X_CalcRawHumidity(ft humidity)
{
    // calculate raw relative humidity [ticks]
    // rawRH = humidity / 100 * (2^16-1)
    return humidity / 100.0f * 65535.0f;
}
```

2.4 i2c_hal.h

```
//=====
//   S E N S I R I O N   AG, Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project   :   SHT3x Sample Code (V1.1)
// File      :   i2c_hal.h (V1.1)
// Author    :   RFU
// Date      :   6-Mai-2015
// Controller:   STM32F100RB
// IDE       :   uVision V5.12.0.0
// Compiler  :   Armcc
// Brief     :   I2C hardware abstraction layer
//=====

#ifndef I2C_HAL_H
#define I2C_HAL_H

//-- Includes -----
#include "system.h"

//-- Enumerations -----

// I2C acknowledge
typedef enum{
    ACK  = 0,
    NACK = 1,
}etI2cAck;

//=====
void I2c_Init(void);
//=====
// Initializes the ports for I2C interface.
//-----

//=====
void I2c_StartCondition(void);
//=====
// Writes a start condition on I2C-Bus.
//-----
// remark: Timing (delay) may have to be changed for different microcontroller.
//
// SDA:  _____|_____
//
// SCL:  _____|_____

//=====
void I2c_StopCondition(void);
//=====
// Writes a stop condition on I2C-Bus.
//-----
// remark: Timing (delay) may have to be changed for different microcontroller.
//
// SDA:  _____|_____
//
// SCL:  _____|_____

//=====
etError I2c_WriteByte(u8t txByte);
//=====
// Writes a byte to I2C-Bus and checks acknowledge.
//-----
// input:  txByte      transmit byte
```

```
//  
// return: error:      ACK_ERROR = no acknowledgment from sensor  
//                   NO_ERROR  = no error  
//  
// remark: Timing (delay) may have to be changed for different microcontroller.  
  
//=====  
etError I2c_ReadByte(u8t *rxByte, etI2cAck ack, u8t timeout);  
  
etError I2c_GeneralCallReset(void);  
  
#endif
```

2.5 i2c_hal.c

```
//=====
//      S E N S I R I O N      AG, Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project      : SHT3x Sample Code (V1.1)
// File         : i2c_hal.c (V1.1)
// Author        : RFU
// Date         : 6-Mai-2015
// Controller    : STM32F100RB
// IDE          : uVision V5.12.0.0
// Compiler      : Armcc
// Brief        : I2C hardware abstraction layer
//=====

//-- Includes -----
#include "i2c_hal.h"

//-- Defines -----
// I2C IO-Pins                               /* -- adapt the defines for your uC -- */

// SDA on port B, bit 14
#define SDA_LOW()    (GPIOB->BSRR = 0x40000000) // set SDA to low
#define SDA_OPEN()  (GPIOB->BSRR = 0x00004000) // set SDA to open-drain
#define SDA_READ    (GPIOB->IDR  & 0x4000)      // read SDA

// SCL on port B, bit 13                       /* -- adapt the defines for your uC -- */
#define SCL_LOW()    (GPIOB->BSRR = 0x20000000) // set SCL to low
#define SCL_OPEN()  (GPIOB->BSRR = 0x00002000) // set SCL to open-drain
#define SCL_READ    (GPIOB->IDR  & 0x2000)      // read SCL

//-- Static function prototypes -----
static etError I2c_WaitWhileClockStreching(u8t timeout);

//-----
void I2c_Init(void)                               /* -- adapt the init for your uC -- */
{
    RCC->APB2ENR |= 0x00000008; // I/O port B clock enabled

    SDA_OPEN(); // I2C-bus idle mode SDA released
    SCL_OPEN(); // I2C-bus idle mode SCL released

    // SDA on port B, bit 14
    // SCL on port B, bit 13
    GPIOB->CRH  &= 0xF00FFFFFF; // set open-drain output for SDA and SCL
    GPIOB->CRH  |= 0x05500000; //
}

//-----
void I2c_StartCondition(void)
{
    SDA_OPEN();
    DelayMicroSeconds(1);
    SCL_OPEN();
    DelayMicroSeconds(1);
    SDA_LOW();
    DelayMicroSeconds(10); // hold time start condition (t_HD;STA)
    SCL_LOW();
    DelayMicroSeconds(10);
}

//-----
void I2c_StopCondition(void)
```

```

{
    SCL_LOW();
    DelayMicroSeconds(1);
    SDA_LOW();
    DelayMicroSeconds(1);
    SCL_OPEN();
    DelayMicroSeconds(10); // set-up time stop condition (t_SU;STO)
    SDA_OPEN();
    DelayMicroSeconds(10);
}

//-----
etError I2c_WriteByte(u8t txByte)
{
    etError error = NO_ERROR;
    u8t mask;
    for(mask = 0x80; mask > 0; mask >>= 1) // shift bit for masking (8 times)
    {
        if((mask & txByte) == 0) SDA_LOW(); // masking txByte, write bit to SDA-Line
        else SDA_OPEN();
        DelayMicroSeconds(1); // data set-up time (t_SU;DAT)
        SCL_OPEN(); // generate clock pulse on SCL
        DelayMicroSeconds(5); // SCL high time (t_HIGH)
        SCL_LOW();
        DelayMicroSeconds(1); // data hold time(t_HD;DAT)
    }
    SDA_OPEN(); // release SDA-line
    SCL_OPEN(); // clk #9 for ack
    DelayMicroSeconds(1); // data set-up time (t_SU;DAT)
    if(SDA_READ) error = ACK_ERROR; // check ack from i2c slave
    SCL_LOW();
    DelayMicroSeconds(20); // wait to see byte package on scope
    return error; // return error code
}

//-----
etError I2c_ReadByte(u8t *rxByte, etI2cAck ack, u8t timeout)
{
    etError error = NO_ERROR;
    u8t mask;
    *rxByte = 0x00;
    SDA_OPEN(); // release SDA-line
    for(mask = 0x80; mask > 0; mask >>= 1) // shift bit for masking (8 times)
    {
        SCL_OPEN(); // start clock on SCL-line
        DelayMicroSeconds(1); // clock set-up time (t_SU;CLK)
        error = I2c_WaitWhileClockStretching(timeout); // wait while clock stretching
        DelayMicroSeconds(3); // SCL high time (t_HIGH)
        if(SDA_READ) *rxByte |= mask; // read bit
        SCL_LOW();
        DelayMicroSeconds(1); // data hold time(t_HD;DAT)
    }
    if(ack == ACK) SDA_LOW(); // send acknowledge if necessary
    else SDA_OPEN();
    DelayMicroSeconds(1); // data set-up time (t_SU;DAT)
    SCL_OPEN(); // clk #9 for ack
    DelayMicroSeconds(5); // SCL high time (t_HIGH)
    SCL_LOW();
    SDA_OPEN(); // release SDA-line
    DelayMicroSeconds(20); // wait to see byte package on scope

    return error; // return with no error
}

```

```
}

//-----
etError I2c_GeneralCallReset(void)
{
    etError error;

    I2c_StartCondition();
    error = I2c_WriteByte(0x00);
    if(error == NO_ERROR) error = I2c_WriteByte(0x06);

    return error;
}

//-----
static etError I2c_WaitWhileClockStreching(u8t timeout)
{
    etError error = NO_ERROR;

    while(SCL_READ == 0)
    {
        if(timeout-- == 0) return TIMEOUT_ERROR;
        DelayMicroSeconds(1000);
    }

    return error;
}
```

2.6 system.h

```
//=====
//      S E N S I R I O N   AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project   :   SHT3x Sample Code (V1.1)
// File      :   system.h (V1.1)
// Author    :   RFU
// Date      :   6-Mai-2015
// Controller:   STM32F100RB
// IDE       :   uVision V5.12.0.0
// Compiler  :   Armcc
// Brief     :   System functions, global definitions
//=====

#ifndef SYSTEM_H
#define SYSTEM_H

//-- Includes -----
#include "stm32f10x.h"          // controller register definitions
#include "typedefs.h"          // type definitions

//-- Enumerations -----
// Error codes
typedef enum{
    NO_ERROR           = 0x00, // no error
    ACK_ERROR          = 0x01, // no acknowledgment error
    CHECKSUM_ERROR     = 0x02, // checksum mismatch error
    TIMEOUT_ERROR      = 0x04, // timeout error
    PARM_ERROR         = 0x80, // parameter out of range error
}tError;

//=====
void SystemInit(void);
//=====
// Initializes the system
//-----

//=====
void DelayMicroSeconds(u32t nbrOfUs);
//=====
// Wait function for small delays.
//-----
// input:  nbrOfUs    wait x times approx. one micro second (fcpu = 8MHz)
// return: -
// remark: smallest delay is approx. 15us due to function call

#endif
```

2.7 system.c

```
//=====
//  S E N S I R I O N  AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project   :  SHT3x Sample Code (V1.1)
// File      :  system.c (V1.1)
// Author    :  RFU
// Date      :  6-Mai-2015
// Controller:  STM32F100RB
// IDE       :  µVision V5.12.0.0
// Compiler  :  Armcc
// Brief     :  System functions
//=====

//-- Includes -----
#include "system.h"

//-----
void SystemInit(void)
{
    // no initialization required
}

//-----
void DelayMicroSeconds(u32t nbrOfUs)    /* -- adapt this delay for your uC -- */
{
    u32t i;
    for(i = 0; i < nbrOfUs; i++)
    {
        __nop(); // nop's may be added or removed for timing adjustment
        __nop();
        __nop();
        __nop();
    }
}
```

2.8 typedefs.h

```
//=====
//  S E N S I R I O N  AG,  Laubisruetistr. 50, CH-8712 Staefa, Switzerland
//=====
// Project   :  SHT3x Sample Code (V1.1)
// File      :  typedefs.h (V1.1)
// Author    :  RFU
// Date      :  6-Mai-2015
// Controller:  STM32F100RB
// IDE       :  µVision V5.12.0.0
// Compiler  :  Armcc
// Brief     :  Definitions of typedefs for good readability and portability.
//=====

#ifndef TYPEDEFS_H
#define TYPEDEFS_H

//-- Defines -----
//Processor endian system
//#define BIG_ENDIAN    //e.g. Motorola (not tested at this time)
#define LITTLE_ENDIAN  //e.g. PIC, 8051, NEC V850
//=====
// basic types: making the size of types clear
//=====
```



```

typedef unsigned char    u8t;        ///< range: 0 .. 255
typedef signed char      i8t;        ///< range: -128 .. +127

typedef unsigned short   u16t;       ///< range: 0 .. 65535
typedef signed short     i16t;       ///< range: -32768 .. +32767

typedef unsigned long    u32t;       ///< range: 0 .. 4'294'967'295
typedef signed long      i32t;       ///< range: -2'147'483'648 .. +2'147'483'647

typedef float            ft;         ///< range: +-1.18E-38 .. +-3.39E+38
typedef double           dt;         ///< range:                .. +-1.79E+308

typedef enum{
    FALSE      = 0,
    TRUE       = 1
}bt;

typedef union {
    u16t u16;           // element specifier for accessing whole u16
    i16t i16;           // element specifier for accessing whole i16
    struct {
        #ifdef LITTLE_ENDIAN // Byte-order is little endian
            u8t u8L;          // element specifier for accessing low u8
            u8t u8H;          // element specifier for accessing high u8
        #else                // Byte-order is big endian
            u8t u8H;          // element specifier for accessing low u8
            u8t u8L;          // element specifier for accessing high u8
        #endif
    } s16;              // element spec. for acc. struct with low or high u8
} nt16;

typedef union {
    u32t u32;           // element specifier for accessing whole u32
    i32t i32;           // element specifier for accessing whole i32
    struct {
        #ifdef LITTLE_ENDIAN // Byte-order is little endian
            u16t u16L;        // element specifier for accessing low u16
            u16t u16H;        // element specifier for accessing high u16
        #else                // Byte-order is big endian
            u16t u16H;        // element specifier for accessing low u16
            u16t u16L;        // element specifier for accessing high u16
        #endif
    } s32;              // element spec. for acc. struct with low or high u16
} nt32;

#endif

```

Revision History

Date	Version	Page(s)	Changes
August 2014	1	All	Initial release
Mai 2015	2	All	Added alert commands, major structural rework

Copyright© 2013 by Sensirion
CMOSens® is a trademark of Sensirion
All rights reserved

Headquarters and Subsidiaries

Sensirion AG
Laubisruestr. 50
CH-8712 Staefa ZH
Switzerland

Phone: +41 44 306 40 00
Fax: +41 44 306 40 30
info@sensirion.com
www.sensirion.com

Sensirion AG (Germany)
Phone: +41 44 927 11 66
info@sensirion.com
www.sensirion.com

Sensirion Inc., USA
Phone: +1 805 409 4900
info_us@sensirion.com
www.sensirion.com

Sensirion Japan Co. Ltd.
Phone: +81 3 3444 4940
info@sensirion.co.jp
www.sensirion.co.jp

Sensirion Korea Co. Ltd.
Phone: +82 31 345 0031 3
info@sensirion.co.kr
www.sensirion.co.kr

Sensirion China Co. Ltd.
Phone: +86 755 8252 1501
info@sensirion.com.cn
www.sensirion.com.cn

To find your local representative, please visit www.sensirion.com/contact